

# SUMP TRAYS TYPE ECO



Storage of max. 4 x 200 litre drums or 2 x 1000 litre containers (IBCs) or 200 l drums or an IBC in combination with 60 litre drums and/or canisters and small cans

- construction made of 2 mm steel sheet
- 100 mm ground leeway
- galvanized grid (load capacity 1000 kg/m<sup>2</sup>)

### Types available

**ECO**

- without raised platform

**ECO-A**

- with raised platform



- every unit tested for leakage
- flammable liquids, GHS categories 1 - 3
- hazardous to aquatic environment, GHS categories 1 - 4

|              | Max. no. of<br>200 litre drums/1000 litre IBCs | Dimensions<br>in mm (l x w x h) | Retention capacity<br>in l | Weight<br>painted / galv. in kg |
|--------------|------------------------------------------------|---------------------------------|----------------------------|---------------------------------|
| ECO 1/200    | 1 / -                                          | 800 x 800 x 455                 | 222                        | 44 / 46                         |
| ECO 2/200    | 2 / -                                          | 1200 x 800 x 360                | 240                        | 54 / 57                         |
| ECO 4/200    | 4 / -                                          | 1200 x 1200 x 285               | 261                        | 68 / 71                         |
| ECO 4/400    | 4 / -                                          | 1200 x 1200 x 410               | 435                        | 77 / 80                         |
| ECO 1/1000   | - / 1                                          | 1460 x 1460 x 620               | 1100                       | 141 / 147                       |
| ECO 2/1000   | - / 2                                          | 2650 x 1300 x 435               | 1128                       | 185 / 195                       |
| ECO-A 1/1000 | - / 1                                          | 1460 x 1460 x 1083              | 1100                       | 150 / 158                       |
| ECO-A 2/1000 | - / 2                                          | 2650 x 1460 x 863               | 1128                       | 233 / 244                       |

# SUMP TRAYS TYPE AW 8-12



AW-12


Storage of max. 12 x 200 litre drums or 200 l drums in combination with 60 litre drums and/or canisters and small cans

- construction made of 3 mm steel sheet
- 100 mm ground leeway
- galvanized grid (load capacity 1000 kg/m<sup>2</sup>)

### Accessories

- Drum Supports type FA, galvanized
- Clip-on Rotating Supports type RA for rotating the drums, galvanized
- Can Shelves type GR, galvanized

► **Accessories** (see page 116)

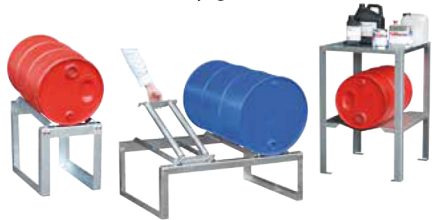

- every unit tested for leakage
- flammable liquids, GHS categories 1 - 3
- hazardous to aquatic environment, GHS categories 1 - 4



AW-8

|       | Max. no. of<br>200 litre drums | Dimensions<br>(l x w x h) in mm | Retention capacity<br>in l | Weight in kg<br>paint. / galv. |
|-------|--------------------------------|---------------------------------|----------------------------|--------------------------------|
| AW-8  | 8                              | 2650 x 1300 x 210               | 340                        | 190 / 200                      |
| AW-10 | 10                             | 3250 x 1300 x 195               | 395                        | 226 / 238                      |
| AW-12 | 12                             | 3850 x 1300 x 200               | 468                        | 260 / 274                      |

Finish:

RAL 2000

RAL 3000

RAL 5012

RAL 6011

RAL 7005

hot-dip galvanized